

MOTOROLA SEMICONDUCTOR TECHNICAL DATA

MOTOROLA SC XSTRS/R F

The RF Line SSB Power Transistors

... designed primarily for wideband, large-signal output and driver amplifier stages in the 2 to 30 MHz frequency range.

- Designed for Class A, AB or C Power Amplifiers
- Specified 13.5 Volt, 28 MHz Characteristics:
 - Output Power — 75 Watts PEP
 - Power Gain — 15 dB Min, Class AB
- 100% Tested for Load Mismatch at All Phase Angles with $\infty:1$ VSWR
- Gold Metallization for Improved Reliability
- Diffused Ballast Resistors

PT9784
PT9784A

15 dB
2-30 MHz
75 WATTS PEP
13.5 VOLTS
SSB POWER
TRANSISTORS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V _{CEO}	20	Vdc
Collector-Base Voltage	V _{CBO}	40	Vdc
Emitter-Base Voltage	V _{EBO}	4	Vdc
Collector Current — Continuous	I _C	15	Adc
Total Device Dissipation @ T _C = 25°C Derate above 25°C	P _D	175 0.572	Watts W/°C
Operating Junction Temperature	T _J	200	°C
Storage Temperature Range	T _{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	R _{θJC}	1.75	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)


Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Base Breakdown Voltage (I _C = 100 mA, I _E = 0)	V _{(BR)CBO}	40	—	—	Vdc
Emitter-Base Breakdown Voltage (I _E = 6 mA, I _C = 0)	V _{(BR)EBO}	4	—	—	Vdc
Collector Cutoff Current (V _{CE} = 13.5 V, V _{BE} = 0)	I _{CES}	—	—	10	mAdc

ON CHARACTERISTICS


DC Current Gain (I _C = 1 A, V _{CE} = 5 V)	h _{FE}	25	—	150	—
---	-----------------	----	---	-----	---

FUNCTIONAL TESTS

Common-Emitter Amplifier Power Gain (V _{CE} = 13.5 V, P _{out} = 75 W PEP, f = 28 MHz)	G _{PE}	15	—	—	dB
Load Mismatch (V _{CE} = 13.5 V, P _{out} = 75 W PEP, f = 28 MHz, Load VSWR = $\infty:1$, All Phase Angles)	ψ	No Degradation in Output Power			
Intermodulation Distortion (V _{CE} = 13.5 Vdc, P _{out} = 75 W PEP, f = 28 MHz)	IMD	—	-32	—	dB



.380 SOE
CASE 145D-01, STYLE 1
PT9784A



.380 SOE F
CASE 211-07, STYLE 1
PT9784

MOTOROLA RF DEVICE DATA

2-1136

TYPICAL CHARACTERISTICS

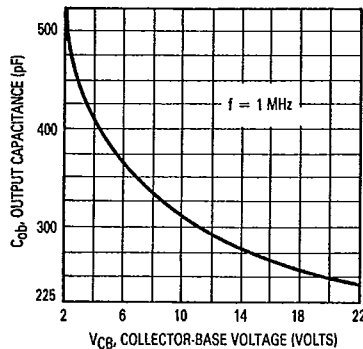


Figure 1. Output Capacitance versus Voltage




Figure 2. Series Input Impedance versus Frequency





Figure 3. Series Load Impedance versus Frequency

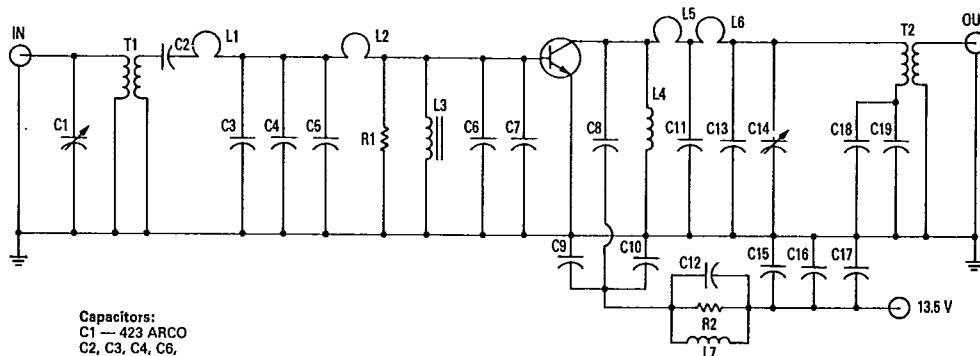

Capacitors:
 C1 — 423 ARCO
 C2, C3, C4, C6,
 C7, C9, C10,
 C13, C18, C19 — 1000 pF UNELCO
 C5 — 500 pF UNELCO
 C8 — 400 pF UNELCO
 C11 — 250 pF UNELCO
 C12, C15 — 0.1 Disc.
 C14 — 469 ARCO
 C16 — 0.01 Disc.
 C17 — 25 MFD, 35 Volts

Resistors:
 R1 — 51 Ohms
 R2 — 16 Ohms 2 W

Coils:
 L1 — #18 AWG, 1-3/8" Long, Looped 3/8" Curve
 L2 — #18 AWG, 1-1/8" Long, Looped 1/4" Curve
 L3 — 2-1/2 T, #24 AWG, Looped thru Ferroxcube VK21107-3B
 L4 — 8 T, #18 AWG, 2 ID, 5-8" Long
 L5 — #18 AWG, 1/4" Long, straight
 L6 — #18 AWG, 1/2" Long, Looped 3/8" Curve
 L7 — 10 T, #20 AWG, Enamel, Wrapped around 16 Ohm, 2 Watt resistor

Transformers:
 T1 — Primary — 4 T, #22 AWG, Teflon insulated
 Secondary — Brass Tube, Length — 11/16"
 T2 — Primary — Brass Tube, Secondary — 3 T, #22 AWG
 Teflon insulated, Length — 1-1/4"

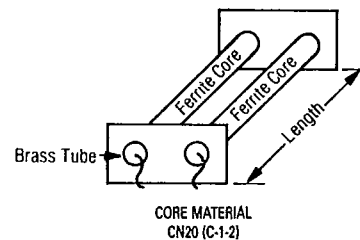


Figure 4. 28 MHz Test Circuit