

查询TCN4-22+供应商

# Ceramic Balun RF Transformer

捷多邦, 专业PCB打样工厂, 24小时加急出货

## TCN4-22+ TCN4-22

50Ω 1200 to 2200 MHz

### Maximum Ratings


|                       |                |
|-----------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature   | -55°C to 100°C |
| Input RF Power**      | 5W             |

\*\*From 85°C derate linearly to 2.5 W at 100°C

### Pin Connections

|               |     |
|---------------|-----|
| PRIMARY DOT   | 2   |
| PRIMARY(GND)  | 1,3 |
| SECONDARY DOT | 4   |
| SECONDARY     | 6   |
| GROUND        | 5   |


### Outline Drawing

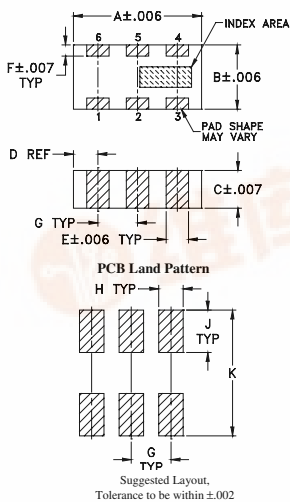

### Outline Dimensions (inch)

|      |      |      |      |      |      |       |
|------|------|------|------|------|------|-------|
| A    | B    | C    | D    | E    | F    |       |
| .126 | .063 | .035 | .024 | .022 | .011 |       |
| 3.20 | 1.60 | 0.89 | 0.61 | 0.56 | 0.28 |       |
| G    | H    | J    | K    |      |      | wt    |
| .039 | .024 | .042 | .123 |      |      | grams |
| 0.99 | 0.61 | 1.07 | 3.12 |      |      | .020  |

Demo Board MCL P/N: TB-298  
Suggested PCB Layout (PL-162)

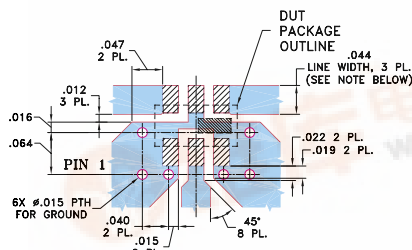

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .020 ± .0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

PDF DENOTES PCB COPPER LAYOUT

PDF DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

### Features

- wideband, 1200 to 2200 MHz
- low phase unbalance
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

### Applications

- GSM
- CDMA
- GPS
- DECT
- PCN
- PCS
- ISM




### Electrical Specifications (T<sub>AMB</sub>=25°C)

| Ω RATIO (Secondary/Primary) | FREQUENCY (MHz) | INSERTION* LOSS (dB) | PHASE UNBALANCE † (Deg.) Typ. | AMPLITUDE UNBALANCE (dB) Typ. |
|-----------------------------|-----------------|----------------------|-------------------------------|-------------------------------|
| 4                           | 1200-2200       | 1.0                  | 10                            | 0.6                           |


\* Insertion Loss is referenced to mid-band loss, 0.9 dB  
† Relative to 180°

### Typical Performance Data

| FREQUENCY (MHz) | INSERTION LOSS (dB) | INPUT R. LOSS (dB) | AMPLITUDE UNBALANCE (dB) | PHASE UNBALANCE (Deg.) |
|-----------------|---------------------|--------------------|--------------------------|------------------------|
| 1200.00         | 0.55                | 12.54              | 0.38                     | 13.12                  |
| 1300.00         | 0.64                | 13.68              | 0.25                     | 13.07                  |
| 1400.00         | 0.73                | 14.80              | 0.04                     | 12.32                  |
| 1500.00         | 0.81                | 15.52              | 0.16                     | 10.86                  |
| 1600.00         | 0.90                | 15.33              | 0.26                     | 8.60                   |
| 1700.00         | 1.00                | 14.39              | 0.33                     | 5.70                   |
| 1800.00         | 1.10                | 13.02              | 0.36                     | 2.10                   |
| 1900.00         | 1.23                | 11.67              | 0.40                     | 1.87                   |
| 2000.00         | 1.35                | 10.47              | 0.38                     | 6.35                   |
| 2100.00         | 1.47                | 9.46               | 0.33                     | 10.89                  |
| 2200.00         | 1.55                | 8.60               | 0.20                     | 15.55                  |

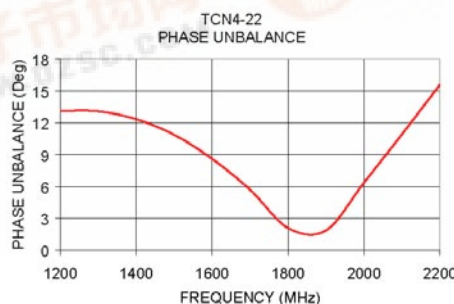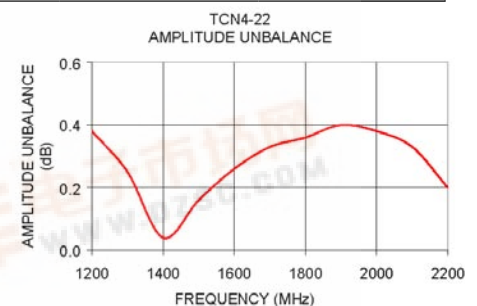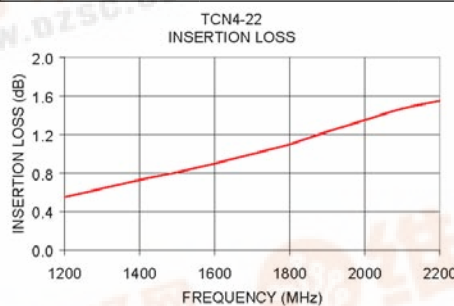

### configuration J



ALL NEW  
minicircuits.com

Mini-Circuits®  
ISO 9001 ISO 14001 CERTIFIED

REV. B  
M102713