




VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
02	RELEASED PER ECO 2321	1/15/91	BJR
03	REDRAWN AND REVISED PER E980221	7/2/98	DPK

查询01000-03供应商

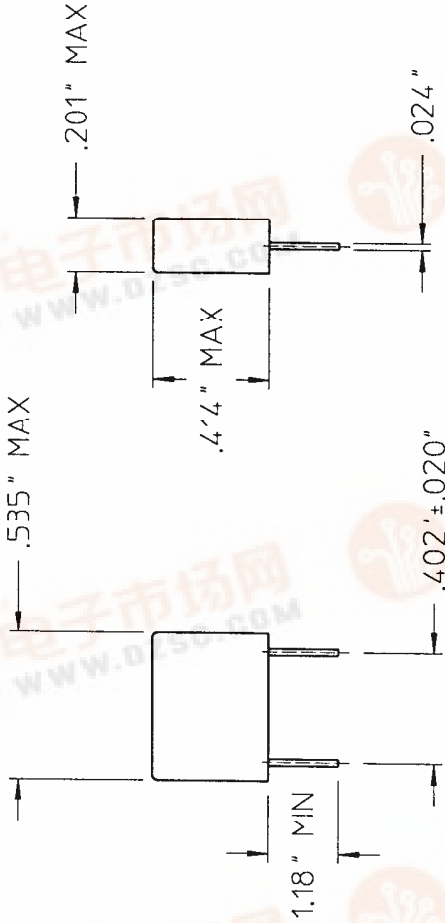

ORIGINAL
ONLY WHEN STAMPED
IN RED

ELECTRICAL SPECIFICATIONS

ATED VOLTAGE	250 VAC
APACITANCE	4700 pF
APACITANCE TOLERANCE	±20%
CLASS	Y CLASS
DISSIPATION FACTOR	1.3% @ 1k-Hz
ELECTRIC VOLTAGE	2700 VDC
INSULATION RESISTANCE @ 500VDC	≥ 12000MΩ
RECOMMENDED VOLTAGE	≥ 1000 VDC
DC APPLICATION	
TEMPERATURE RANGE	-40 TO +85°C

NOTES:

1. APPROVALS INCLUDE SEMKO, NEMKO, DEMKC, EI, VDE, SEV, OVE, IMQ, UL, CSA.

COPY

DRAWN BY	DATE
	7/2/98
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES +1/64 .XX .01 .1° .XXX .005	
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	

VICOR	
CAPACITOR - (Y)	
4700 pF ±20%, 250 VAC	
SIZE	REV
B 67131	03
FSCM NO.	DWG NO.
01000	01000
SCALE	SHEET
2:1	1 OF 1

捷多邦，专业PCB打样工厂，24小时加急出货