

T-33-11

MOTOROLA SEMICONDUCTOR TECHNICAL DATA

MRF450 MRF450A

The RF Line

NPN SILICON RF POWER TRANSISTORS

... designed for power amplifier applications in industrial, commercial and amateur radio equipment to 30 MHz.

- Specified 12.5 Volt, 30 MHz Characteristics -
Output Power = 50 Watts
Minimum Gain = 11 dB
Efficiency = 50%


MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V _{CEO}	20	Vdc
Collector-Base Voltage	V _{CBO}	40	Vdc
Emitter-Base Voltage	V _{EB0}	4.0	- Vdc
Collector Current - Continuous	I _C	7.5	A dc
Total Device Dissipation @ T _C = 25°C	P _D	115	Watts
Derate above 25°C		0.66	W/°C
Storage Temperature Range	T _{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	R _{θJC}	1.53	°C/W

FIGURE 1 — 30 MHz TEST CIRCUIT SCHEMATIC

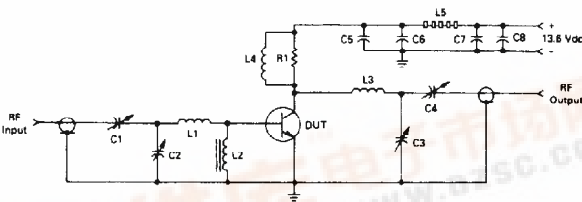

- C1 — 14-150 pF, ARCO 424
- C2, C3, C4 — 170-780 pF, ARCO 469
- C5, C8 — ERIE 0.1 μF @ 100 V RED CAPS
- C6 — 1000 pF UNELCO, 350 Vdc
- C7 — 10 μF, 35 Vdc
- R1 — 100 Ω, 2.0 W Carbon
- L1 — 0.15 μH Molded Choke MILLER
- L2 — FERROXCUBE, VK200-20-4B
- L3 — 3 Turns, #14 Bare Tinned Wire, 0.3" (0.79) I.D. x 0.38" (0.97) Long
- L4 — 9 Turns, #20 Enamel Wire, Close Wound on R1
- L5 — FERROXCUBE #56-570-653B, 5 Ferrite Beads, on 1" Long #20 Wire
- Input/Output Connectors — Type N
- Board — Glass Teflon Mounted on a 4" x 4" x 2" SEEZAK Box

50 W - 30 MHz
RF POWER
TRANSISTORS
NPN SILICON




NOTES
1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982
2 CONTROLLING DIMENSION INCH

STYLE 1:
PIN 1 EMITTER
2 BASE
3 EMITTER
4 COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	24.38	25.14	0.960	0.990
B	9.40	9.90	0.370	0.390
C	5.80	7.13	0.228	0.281
D	5.47	5.96	0.215	0.235
E	2.18	2.86	0.086	0.105
H	3.81	4.37	0.150	0.180
J	0.11	0.15	0.004	0.005
K	10.04	10.28	0.395	0.405
M	40°	50°	40°	50°
Q	2.88	3.30	0.113	0.130
R	6.23	6.47	0.245	0.255
S	20.07	20.57	0.790	0.810
U	18.29	18.54	0.720	0.730

CASE 211-07
MRF450

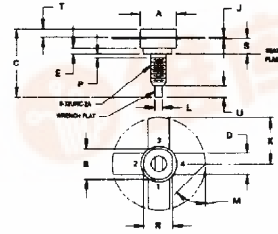

NOTES
1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982
2 CONTROLLING DIMENSION INCH

STYLE 1:
PIN 1 EMITTER
2 BASE
3 EMITTER
4 COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	9.90	0.370	0.390
B	6.11	6.36	0.240	0.250
C	11.02	20.07	0.433	0.790
D	5.46	5.97	0.215	0.235
E	1.78	—	0.070	—
J	0.08	0.18	0.003	0.007
K	12.45	—	0.490	—
L	1.40	1.78	0.055	0.070
M	40°	50°	40°	50°
P	—	1.27	—	0.050
R	7.59	7.80	0.298	0.307
S	4.01	4.52	0.158	0.178
T	2.11	2.54	0.083	0.100
U	7.49	3.30	0.295	0.132

CASE 145A-09
MRF450A



2

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage ($I_C = 100\text{ mA dc}, I_B = 0$)	$V_{(BR)CEO}$	20	—	—	Vdc
Collector-Emitter Breakdown Voltage ($I_C = 20\text{ mA dc}, V_{BE} = 0$)	$V_{(BR)CES}$	40	—	—	Vdc
Collector-Base Breakdown Voltage ($I_C = 20\text{ mA dc}, I_E = 0$)	$V_{(BR)CBO}$	40	—	—	Vdc
Emitter-Base Breakdown Voltage ($I_E = 10\text{ mA dc}, I_C = 0$)	$V_{(BR)EBO}$	4.0	—	—	Vdc
ON CHARACTERISTICS					
DC Current Gain ($I_C = 1.0\text{ A dc}, V_{CE} = 5.0\text{ V dc}$)	h_{FE}	10	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance ($V_{CB} = 15\text{ V dc}, I_E = 0, f = 1.0\text{ MHz}$)	C_{ob}	—	—	200	pF
FUNCTIONAL TESTS (Figure 1)					
Common-Emitter Amplifier Power Gain ($V_{CC} = 13.6\text{ V dc}, P_{out} = 50\text{ W}, I_C(\text{max}) = 6.13\text{ A dc}, f = 30\text{ MHz}$)	G_{PE}	11	15	—	dB
Collector Efficiency ($V_{CC} = 13.6\text{ V dc}, P_{out} = 50\text{ W}, I_C(\text{max}) = 6.13\text{ A dc}, f = 30\text{ MHz}$)	η	50	—	—	%
Series Equivalent Input Impedance ($V_{CC} = 13.6\text{ V dc}, P_{out} = 50\text{ W}, f = 30\text{ MHz}$)	Z_{in}	—	1.56-j.89	—	Ohms
Series Equivalent Output Impedance ($V_{CC} = 13.6\text{ V dc}, P_{out} = 50\text{ W}, f = 30\text{ MHz}$)	Z_{out}	—	174-j.50	—	Ohms

