

SANYO	NO.1482C	LB1249
	Active-Low Input, 8-Unit, High-Current, Low-Saturation Driver	

Applications

- . 4-phase stepping motor driver of 2 channels.
- . Especially suited for X-Y axis plotter printer driver.
- . High current, low saturation voltage general-purpose 8-unit driver (relay, LED, lamp solenoid, etc.)

Features

- . Low active input type.
- . On-chip input protecting diodes.
- . High current capacity (400mA) and low saturation voltage (0.5Vmax).
- . On-chip spark killer diodes.
- . Wide duty due to Pd of 3W max.


Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Condition	Value	Unit
Maximum Supply Voltage	V _{CC1,2}		-0.3 to +7.0	V
Output Supply Voltage	V _{OUT}		-0.3 to +10.0	V
Input Supply Voltage	V _{IN}	GND ≤ V _{IN}	V _{DD} -7.0 to V _{DD} +15	V
Output Current	I _{OUT}	Per unit	400	mA
Spark Killer Diode	I _{FSM}	Pulse width ≤ 35ms	400	mA
Forward Current		duty 5%		
GND Pin Current	I _{GND}	Pulse width ≤ 35ms	3.4	A
Instantaneous Current	I _{CCP}	Pulse width ≤ 35ms	3.2	A
Dissipation		duty 5%		
Allowable Power Dissipation	Pdmax		3.0	W
Operating Temperature	T _{opr}		-20 to +75	°C
Storage Temperature	T _{stg}		-40 to +125	°C


Allowable Operating Conditions at Ta=25°C

Parameter	Symbol	Condition	Value	Unit
Supply Voltage	V _{CC1}		2.3 to 6.0	V
	V _{DD}		2.3 to 6.0	V
"H" Level Input Voltage	V _{IH}	GND ≤ V _{IN} , I _{OUT} = 200mA	V _{DD} -6.0 to V _{DD} -2.3	V
"L" Level Input Voltage	V _{IL}	I _{OUT} ≤ 100µA	V _{DD} -0.7 to V _{DD} +15	V

Pin Assignment

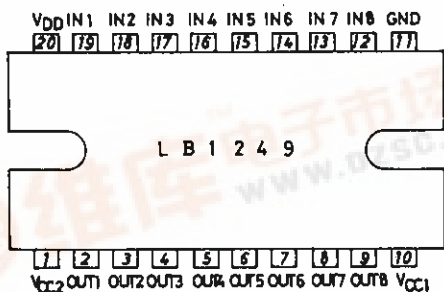

Package Dimensions 3037A-D20HIC (unit: mm)

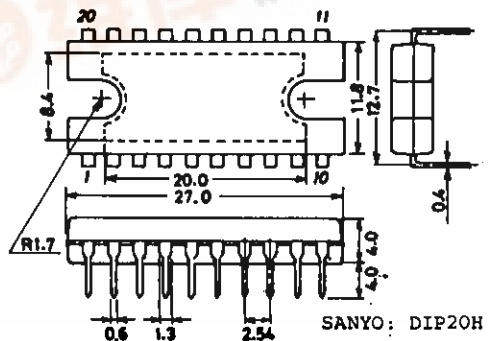


LB1249


Electrical Characteristics at $T_a=25^{\circ}\text{C}$, $V_{DD}=V_{CC1}=V_{CC}$

			min	typ	max	unit
Output Voltage	V_{OUT1}	$V_{CC}=2.3\text{V}, V_{IN}=V_{CC}-2.3\text{V},$ $I_{OUT}=200\text{mA}$			0.4	V
Output Voltage	V_{OUT2}	$V_{CC}=3.5\text{V}, V_{IN}=V_{CC}-3.0\text{V},$ $I_{OUT}=200\text{mA}$			0.25	V
Output Voltage	V_{OUT3}	$V_{CC}=6.0\text{V}, V_{IN}=V_{CC}-5.5\text{V},$ $I_{OUT}=400\text{mA}$			0.5	V
Output Sustain Voltage	$V_{O(sus)}$	$I_{OUT}=400\text{mA}, t \leq 10\mu\text{s}$	10			V
Input Current	I_{IN}	$V_{IN}=V_{CC}-6.0\text{V}, I_{OUT}=0$	-1.0			mA
Supply Leakage Current	$I_{CC(OFF)}$	$V_{CC}=6.0\text{V}, V_{IN}=V_{CC}$			20	μA
Output Leakage Current	I_{OFF}	$V_{OUT}=V_{CC}=6.0\text{V}, V_{IN}=V_{CC}-0.7\text{V}$			100	μA
Spark Killer Diode Forward Voltage	$V_{F(S)}$	$I_{F(S)}=400\text{mA}$			3.0	V
Spark Killer Diode Reverse Current	$I_{R(S)}$	$V_{OUT}=0\text{V}, V_{CC2}=6.0\text{V}$			30	μA

Equivalent Circuit

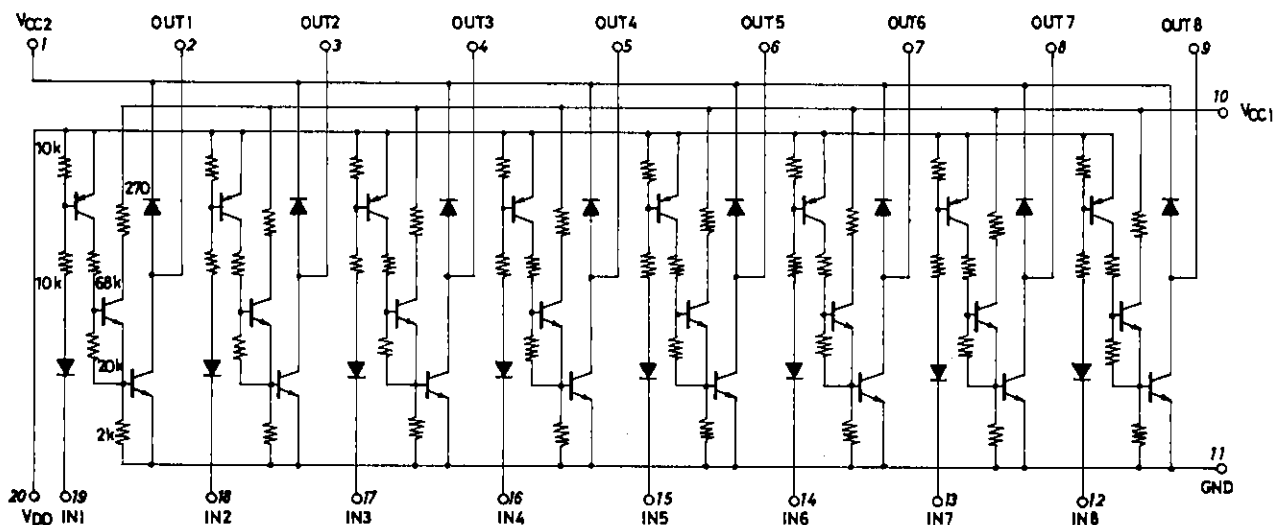

Unit (resistance: Ω)

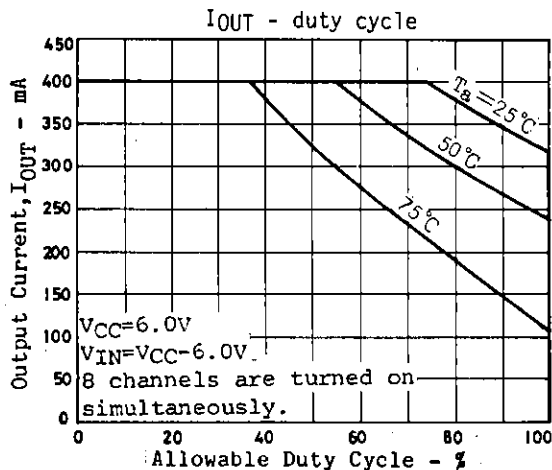

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.