


SAW Bandpass Filter 201106B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

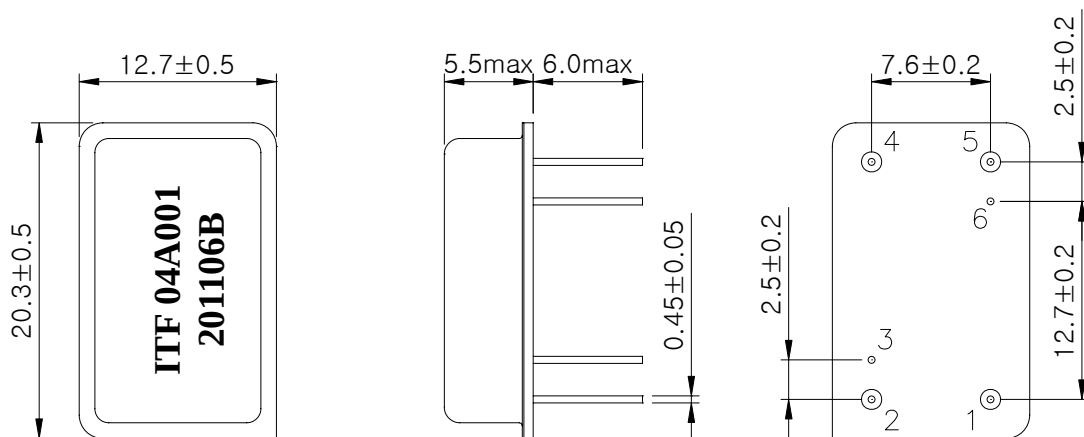

Package : D2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
4	Output
2, 5	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201106B	
		Rev. Date	2004-06-24	
		Rev.	NI1019-CS03	1/5

SAW Bandpass Filter 201106B

3. Specifications

Fo = 70.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	69.94	70.0	70.06
Insertion Loss	dB	-	23.8	25.0
1dB Bandwidth	MHz	-	2.72	-
3dB Bandwidth	MHz	3.0	3.08	-
40dB Bandwidth	MHz	-	4.4	4.5
Amplitude Ripple (Fo +/- 1.1 MHz)	dB	-	0.8	1.0
Group Delay Variation (Fo +/- 1.1 MHz)	Nsec	-	100	200
Absolute Delay	Usec	-	2.49	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201106B	
		Rev. Date	2004-06-24	
		Rev.	NI1019-CS03	2/5

SAW Bandpass Filter 201106B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

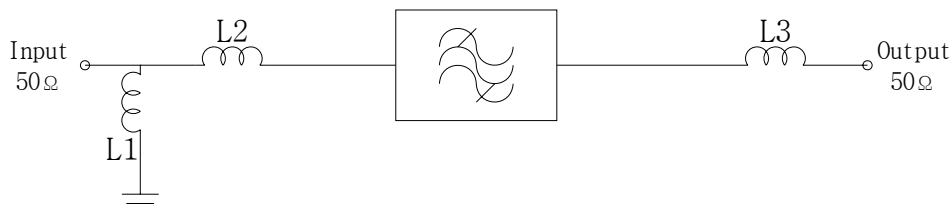

$$L2 = L3 = 330 \text{ nH}$$

$$L1 = 82 \text{ nH}$$

5. Marking Configuration

ITF¹⁾ 04A001²⁾

201106B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201106B	
		Rev. Date	2004-06-24	
		Rev.	NI1019-CS03	3/5

SAW Bandpass Filter 201106B



6. Typical Performance (at +25℃)

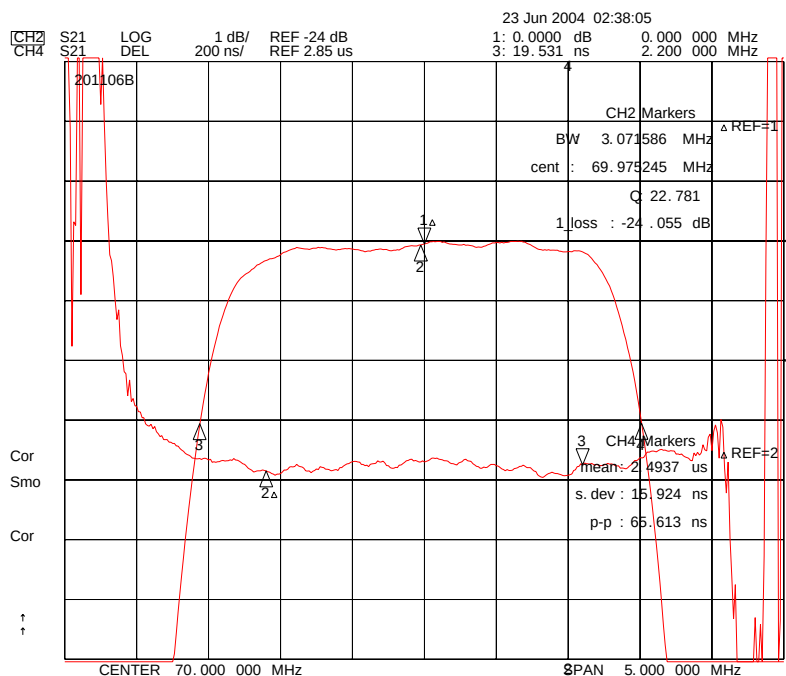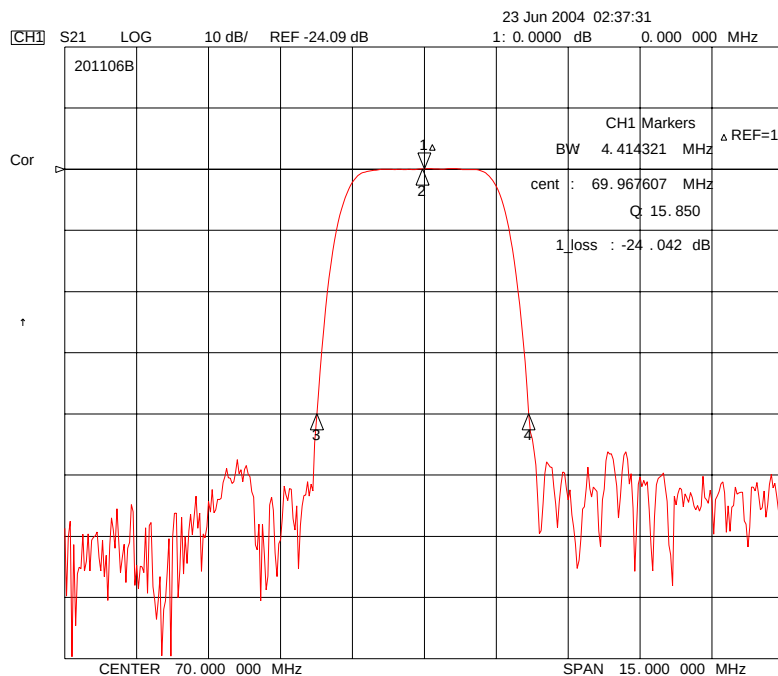

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

201106B

Rev. Date





2004-06-24

Rev.

NI1019-CS03

4/5

SAW Bandpass Filter 201106B

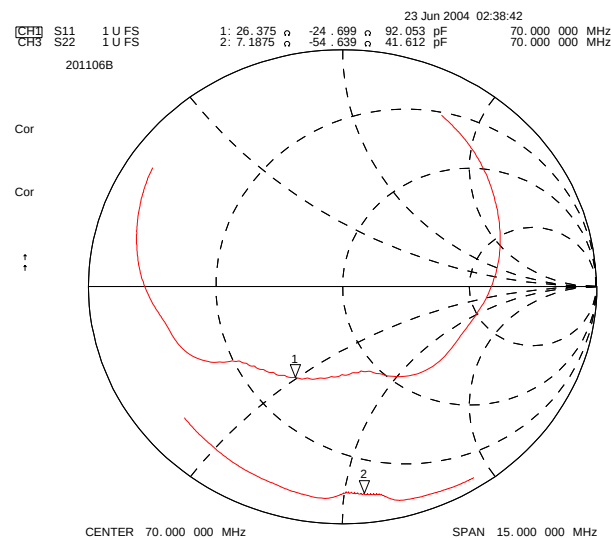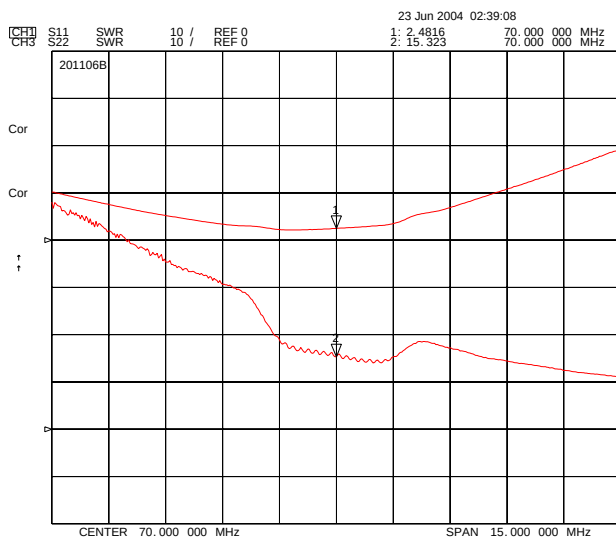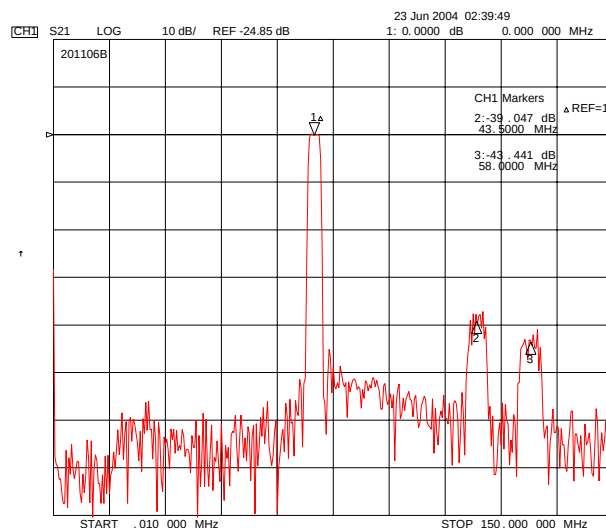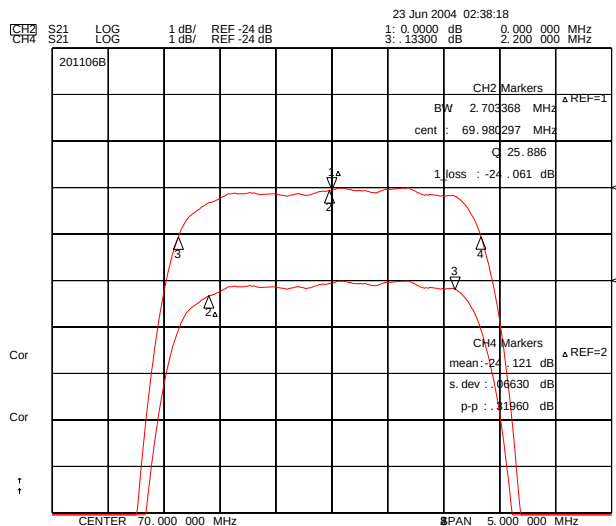

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

201106B

Rev. Date

2004-06-24

Rev.

NI1019-CS03

5/5